

## 4-to-1 TETRA Combiner

Type 2040


The COMM-connect 4-to-1 TETRA combiner allows for four stations to utilize one antenna. The combiner is equipped with BNC female connectors, which makes it very easy to install in any type of installation. Mechanical mounting is made easy by mounting flaps protruding the casing.

### 4-to-1 TETRA Combiner, Type 2040, Specifications:


- Frequency range: 360 MHz to 420 MHz
- Insertion Loss total: < -7 dB
- Isolation, input to input: > 30 dB (380 - 390 MHz)
- Power rating, each input: 10 Watts
- Impedance: 50 Ω
- Number of inputs: 4
- SWR input/output: <1.2:1, -20 dB
- Temperature range: -20 to 60 °C
- Connector: BNC Female
- Size incl. connectors: 147 x 135 x 31 mm
- Weight: approx. 500 grams



Insertion loss, Antenna to Port 1:

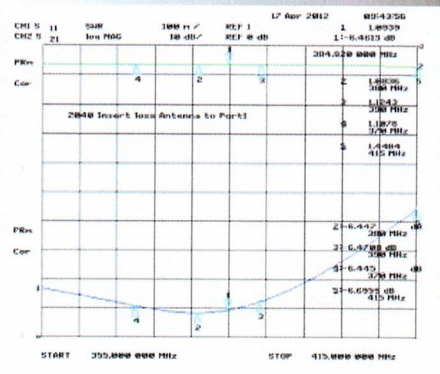

Insertion loss, Port 1 to Port 2:

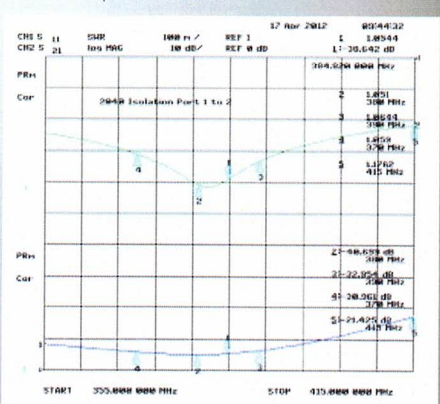

COMM-connect A/S reserves the right to change prices and specifications without prior notice